



**PRODUCT
CODE**
WK 25 DE
WB 25 DE
WF 25 DE
WK 25 E
WB 25 E
WF 25 E



WAFFLE MACHINE USER MANUAL



WB 25 DE



WB 25 DE



WF 25 DE



WF 25 E

CONTENTS

PAGE NO	ISSUES
1-2	COVER
3	CONTENTS
4	PRESENTATION
5	TECHNICAL SPECIFICATIONS
6	OVERALL DIMENSIONS, ELECTRIC SCHEME
7	WARNING SIGNS
8	PRODUCT LABEL INFORMATION
9	SECURITY DETAILS
10	HANDLING AND RELOCATION
11-12	USING THE DEVICE, CLEANING AND MAINTENANCE
13	WARRANTY CONDITIONS
14-15	EXPLODED VIEW
16	SPARE PARTS LIST
17	CE DECLARATION

PRESENTATION

Hi there ,

We thank you for your confidence in choosing our device and our company. Our devices are used in 60 countries around the industrial kitchen with you . Our device is manufactured in accordance with international standards.

To receive output from the device to your expectations , and certainly you read the manual to use long-term , we strongly advise users to your instructor . Before calling our service , we ask you to consider the following points.

- ☞ Guide your hand , please read carefully before use and using the device , to allow the reading of using the device. When you run manual reading device from the machine will be out of warranty .

- ☞ Order installation of our product you received , giving information about the use and care manual in accordance with the laws and regulations of the electrical installation should be read carefully. Device connection way qualified personnel of our authorized service personnel to ensure good preparation before for installation.

- ☞ Nearest to you and you do not understand the issues hesitated You want information from an authorized phone service .

- ☞ and if the costs of the service personnel called to stand ☞ Installation Keep in mind that for every hour waiting fee will be billed to you.


- ☞ We hope that you get the most out of our product ...



TECHNICAL SPECIFICATIONS


TECHNICAL SPECIFICATIONS	SINGLE WK / WB 25 /WF25E	DOUBLE WK / WB / WF DE
TOTAL ELECTRIC POWER (KW)	2,2	2,2 + 2,2
MY MAINS SUPPLY VOLTAGE (V AC)	230	230
OPERATING FREQUENCY (Hz .)	50 / 60	50 / 60
RATED CURRENT (A)	10	10
POWER CORD (number of vessels x mm)	3X2,5	3X2,5
Max. -Min . OPERATING TEMPERATURE (°C)	280 – 270	280 – 270
COOKING SURFACE	CAST IRON SQUARE AND CLOVER PINE SURFACE	CAST IRON SQUARE AND CLOVER PINE SURFACE
THERMOSTAT OPERATING RANGE (° C)	50 – 300	50 – 300
SIZE (Aspect - height) mm	300x320x300	600x320x300
MAX SLOPE	5°	5°
CLASS	1	1
PROTECTION CLASS	IP 20	IP 20
WORK BENCH HEIGHT (MM)	550	550

OVERALL DIMENSIONS

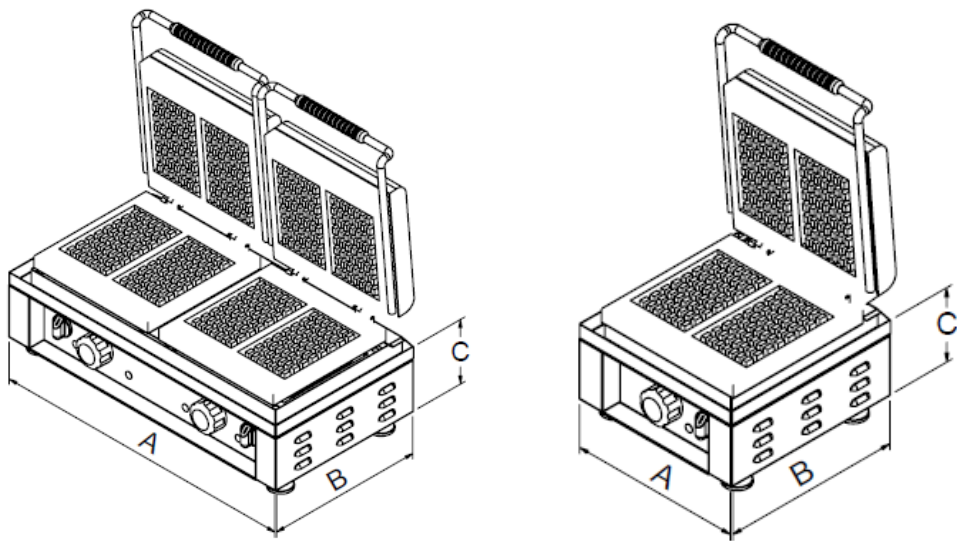

CODE	A	B	C
WK 25 , WB 25 , WF25E	30 cm	32 cm	30 cm
WK 25.DE, WB 25 DE, WF25 DE	60 cm	32 cm	30 cm


*ELECTRIC SCHEME

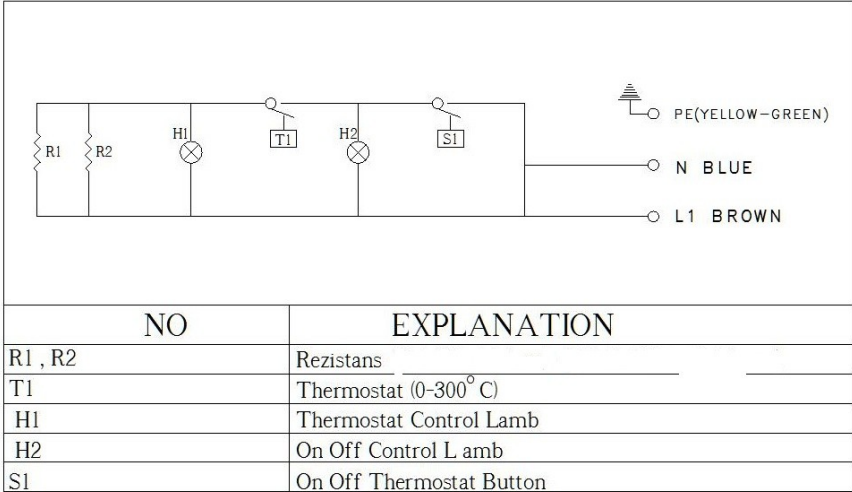

WARNING SIGNS



PROTECTION GROUNDING



PE

GROUNDING NETWORK



ELECTRICITY





HIGH TEMPERATURE



ELECTRICAL CONNECTION VALUES



230V NPE / 50/60 Hz



Voltage : 230V
Network Connection: Single Phase
Terrestrial Trunked
Frequency : 50/60 Hz.



PRODUCT LABEL INFORMATION



WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WK 25 E	TARİH (Date) 08.2019	
SERİ NO (Serial) 42996	AĞIRLIK (Weight) 19 Kg	
GÜÇ (Power) 2.2 KW	VOLTAJ (Voltage) 210 - 230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 50-60 Hz	IP 20	BROWN L
AKIM / (Current) 10 A	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		

WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WK 25 DE	TARİH (Date) 08.2019	
SERİ NO (Serial) 43668	AĞIRLIK (Weight) 37 Kg	
GÜÇ (Power) 2.2 + 2.2 KW	VOLTAJ (Voltage) 2 x 210-230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 60 Hz	IP 20	BROWN L
AKIM / (Current) 10A + 10A (20A)	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		

WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WF 25 E	TARİH (Date) 08.2019	
SERİ NO (Serial) 43811	AĞIRLIK (Weight) 19 Kg	
GÜÇ (Power) 2.2 KW	VOLTAJ (Voltage) 210 - 230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 60 Hz	IP 20	BROWN L
AKIM / (Current) 10 A	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		


WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WF 25 DE	TARİH (Date) 08.2019	
SERİ NO (Serial) 42776	AĞIRLIK (Weight) 37 Kg	
GÜÇ (Power) 2.2 + 2.2 KW	VOLTAJ (Voltage) 2x210-230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 50-60 Hz	IP 20	BROWN L
AKIM / (Current) 10A + 10A (20 A)	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		

WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WB 25 E	TARİH (Date) 08.2019	
SERİ NO (Serial) 43533	AĞIRLIK (Weight) 18 Kg	
GÜÇ (Power) 2.2 KW	VOLTAJ (Voltage) 210 - 230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 60 Hz	IP 20	BROWN L
AKIM / (Current) 10 A	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		

WAFFLE MAKİNESİ / WAFFLE MACHINE		
SGS		TEL : +90 (0232) 257 52 23-33 FAX : +90 (0232) 257 53 03
MODEL (Type) WB 25 DE	TARİH (Date) 04.2019	
SERİ NO (Serial) 43063	AĞIRLIK (Weight) 33 Kg	
GÜÇ (Power) 2.2 + 2.2 KW	VOLTAJ (Voltage) 2 x 210-230 V 1F + N	CONNECTING TABLE
FREKANS (Frequency) 50-60 Hz	IP 20	BROWN L
AKIM / (Current) 10A + 10A (20 A)	SINIF (Class) 1	BLUE N
		YELLOW/GREEN 
SGS MUTFAK EKİPMANLARI LTD.ŞTİ / MADE IN TURKEY Cumhuriyet Mah.Balkan Cad.No 20 Yazıbaşı / TORBALI / İZMİR www.sgseven.com info@sgseven.com		

SAFETY WITH DETAILS

- ☞ Solid and liquid combustible materials of all kinds in the area where the device is working (clothing , alcohol and derivatives, petro - chemical products, wood and plastic , curtains , etc.) should not be taken .
- ☞ The device must contain water that must be cleaned by spraying
- ☞ You can use our device together with our other products in the same series.
- ☞ This device must be installed in accordance with current regulations and should be used only in a well -ventilated area. Refer to the device 's facility and instructions before use.
- ☞ outside the manufacturer or its authorized service should not interfere with the device.
- ☞ In the area where the device is used without any reason to panic in case of fire flames flare (if any) to use the fire extinguishers closing the gas valve and power switch. Never use water to extinguish the flames.
- ☞ The device operating voltage 220 V to 240 V NPA ~ / 50 Hz. Do not use a power supply voltage other than that.
- ☞ After washing the material to be fried should be placed on the filtration of water from the Platte .
- ☞ After the plug is inserted into the waffle maker that supplies should not be placed on the thermostat light to flash fried plate (cooking temperature thermostats light from the flash) . If you set the thermostat light started to flash fry frying process it can not be qualified .
- ☞ Electrical connections to supply insurance against the danger of leakage current of 30 mA leakage current must be performed by placing insurance.
- ☞ Use heat-resistant gloves. Do not use iron -tipped spatula.
- ☞ If the supply cord is damaged in connection with type Y connection equipment, this cord must be replaced by the manufacturer or its service agent or a qualified personnel at the same time to prevent a hazardous situation.
- ☞ This device must be installed in accordance with the current regulations and should only be used in a well-ventilated place. Consult the instructions before installation and use of the device.
- ☞ This device is not intended for use by persons with physical, sensory or mental disabilities (including children) or persons with inadequate experience or knowledge unless supervised and controlled by the person responsible for the safe operation of the device.




HANDLING AND RELOCATION

- * Network to be disconnected before transporting .
- * Portable device obtained by manpower.
- * Hit a when moving the product and do not drop .
- * In order to reach the device under normal operating height of 550 (± 10) mm bench should be set high. * Underset bench of the device will be set up and should be put to work in the plane of the device scales .
- * The device 's electrical connections should be checked by a qualified electrician should connect the fuse on the ground from a height of 1800 mm .. nearest grounding grounding bar connected to the socket on the panel that will be used must be provided. Panels must be used 16 auto insurance for individual models.

DİKKAT ! : NEVER OPERATE FROM YOUR DEVICE CONNECTING EARTH LINE

CONTROL BOARD

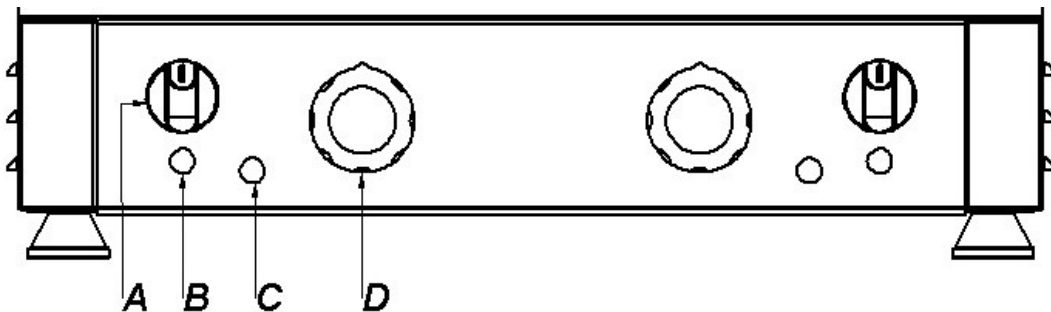

Control Board

A.PAKO SWITCH SWITCH

B.ENERJ WARNING LIGHT

C.TERMOSTAT WARNING LIGHT

D. THERMOSTAT SWITCH

USING THE DEVICE

PURPOSE AND USE

This product is used in restaurants, fast food in the canteen and so on. Used in place. Before first use of the device (the plug is inserted) starting from the complete outer surface of the platinum hair, cloth dipped in warm soapy water should be wiped with care. The device must be connected to the ventilation ducts under the hood filter.

NOTE: Do not go beyond the intended use. Knowing the machine safety and technical requirements and should be used by someone who read the user guide

1. But cable to connect best insurance. (Yellow warning light will illuminate indicating that occurred on the device). Open the
2. Switch and "0" on the thermostat to the cooking temperature (275 °C) to bring (the green light will illuminate). Although your cutting the electricity grid in order to save on a short waiting period during
3. Turn my thermostat to take hold, bringing to 80 °C. (If grid power is interrupted due to the cold of the next cooking process leaving sufficient temperature for the platinum hair will cause the loss of time and energy.)
4. Daily after use before the thermostat to "0" position. Then you get to switch off respectively and V Automatic cut electricity from the insurance company.
5. The meter energy make the cleaning of the device after a power failure.
6. Daily at temperatures between -5°C + 40°C and humidity of up to 65% to operate in ambient conditions is recommended

CLEANING AND MAINTENANCE

PERIODIC MAINTENANCE AND CLEANING

Consumers must be made by :

The device before first use and after each use and later (without electrical devices) starting from the complete outer surface of the platinum hair, wipe it with a sponge and liquid cleaning agent.

Spirit of salt during cleaning, the elvers etc. Do not use cleaning materials such as.

THE LIFE DEVICES : When using the recommended conditions, the lifetime of the device 10 years

USING THE DEVICE



ATTENTION! : As described in the installation and use of the device Care should be taken to be installed and operated . Any failure When faced with the situation of our nearest authorized service Let me know.

When EQUIPMENT FAILURE RESPONSE ONLY POWERS AUTHORIZED SERVICE SGS OVEN these. Authorized Service of EXCEPT FOR A TECHNICAL STAFF MEMBER OR incompetent THE UNIT INTERVENTION

DEVICE WARRANTY WILL REMAIN OUTSIDE.

SO THE UNAUTHORIZED PERSONS ABSOLUTELY NOT ALLOW THE DEVICE DO NOT INTERVENE . THESE CONDITIONS SHALL BE LIABLE FOR ANY WAY MANUFACTURING COMPANY . Our AUTHORIZED SERVICE DURING SERVICE ORIGINAL SPARE PARTS WITHOUT ANY REASON OFFER CAN NOT USE . IN ANY WAY THIS IS NOT THE ORIGINAL EQUIPMENT FITTED WITH PARTS





DEVICE WARRANTY EXCLUDES.








- 1) The warranty period starts from the date of delivery and 2 years.
- 2) The goods are under guarantee of our firm, including all parts.
- 3) In case of defects within the warranty period, it added to the warranty period repair. The repair time is up to 20 business days. This period starts on the failure of the service station, in the absence of the service station, the property dealer, distributor, agent, representative, importer or manufacturer will start from the date of the notification from one-producers. Consumers malfunction notification by phone, fax, e-mail, not registered mail return receipt or similar means possible. However, the burden of proof belongs to the customer in case of dispute. Defection until the completion of the repair of the goods manufacturer-producer or importer can not be eliminated within 10 days, have to be allocated to the use of other consumer goods have similar characteristics.
- 4) Materials and labor needed within the warranty period, as well as in case of failure due to installation errors, labor costs, the cost of parts replaced or under any other name without demanding any fee will be repaired.
- 5) Although we use the right consumer goods repair; from the date of delivery to engaging in, as to stay within the warranty period, in a year; at least four times or manufacturer-producer and / or failed six times in addition to the warranty period set by importers, perpetuate the inability to take advantage of these faults malt, Exceeding the maximum time required for -Tamir, The -Company mania service station, service station order seller in the absence of, dealer, agency representatives importer or repairing the reporting malfunctions to edit one of the manufacturers and producers to determine whether a possible case of consumer goods free of alteration, refund or shame rate may demand a price reduction.
- 6) Failure resulting in the use contrary to the instructions for use of the goods are out of warranty issues.
- 7) For problems that may arise in connection with a guarantee certificate of the Ministry of Industry and Trade, and Consumer Protection of Competition may apply to the General Directorate.

WAFFLE MAKİNALARI / WAFFLE MACHINES

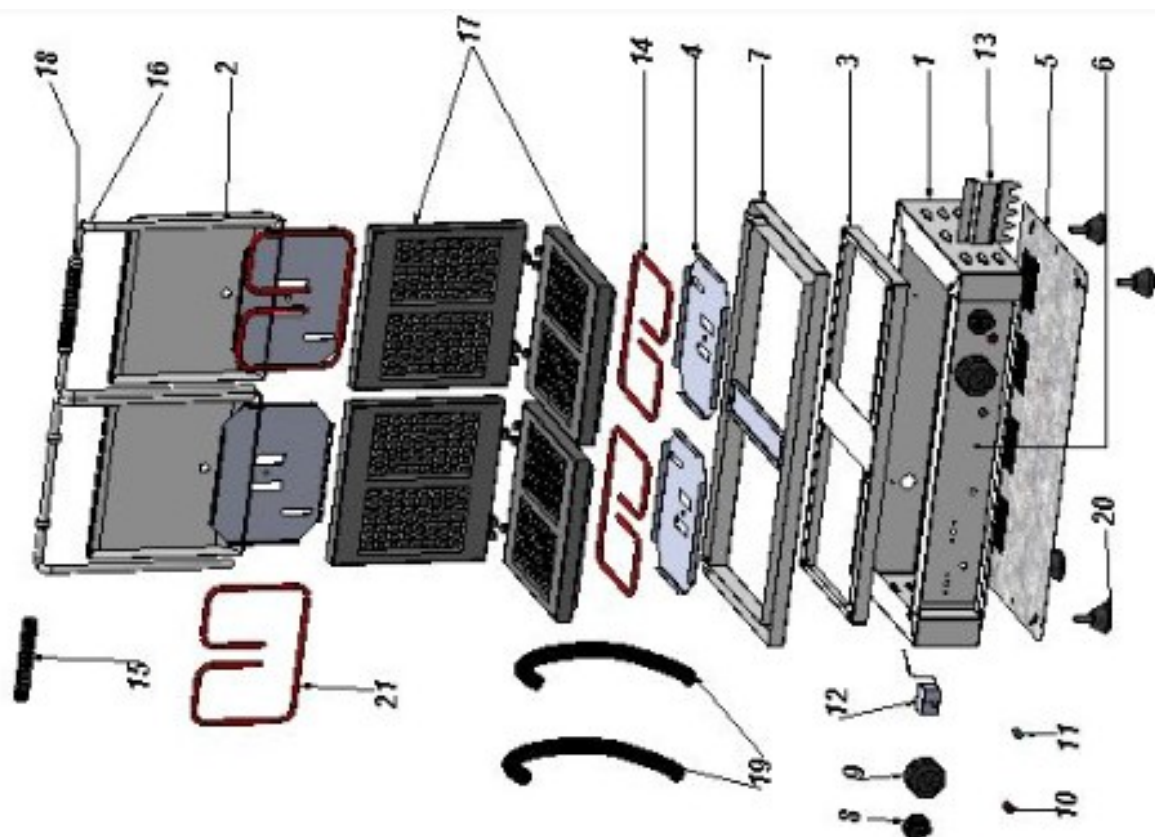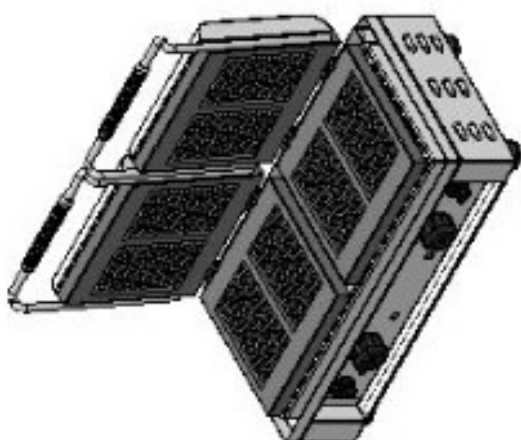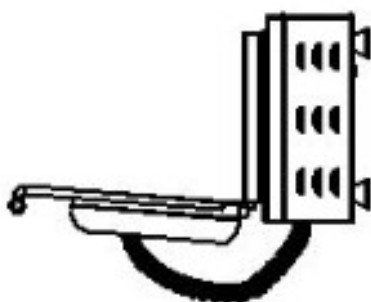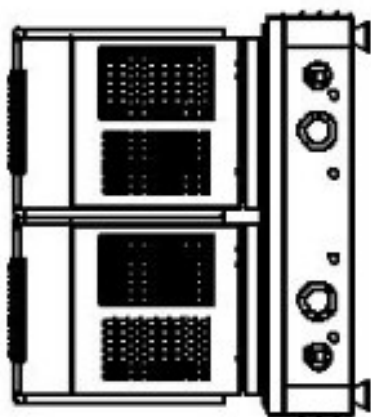

WAFFLE MAKINALARI / WAFFLE MACHINES

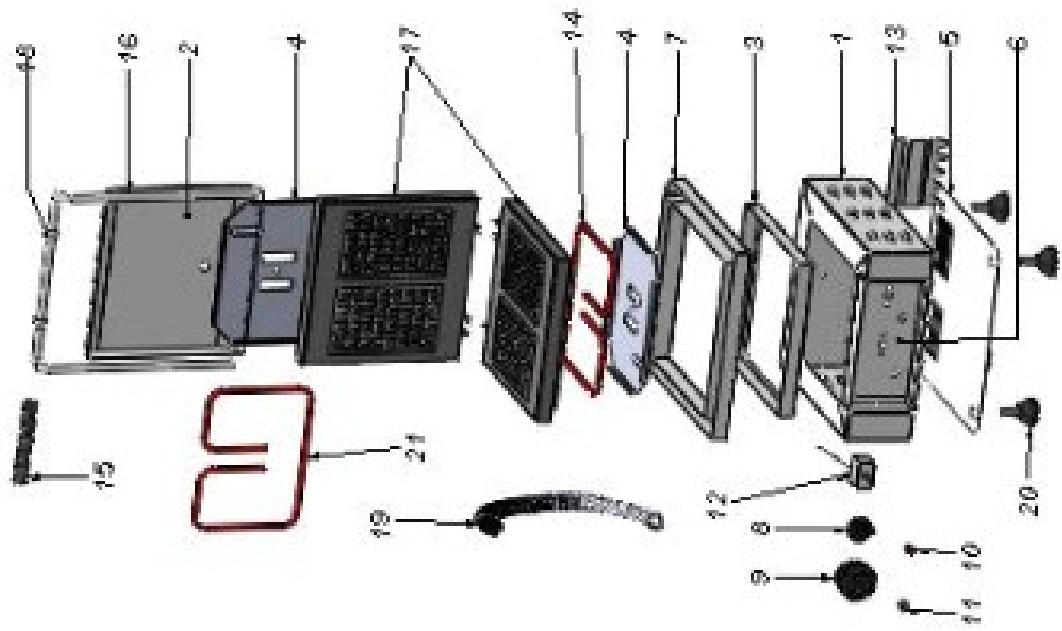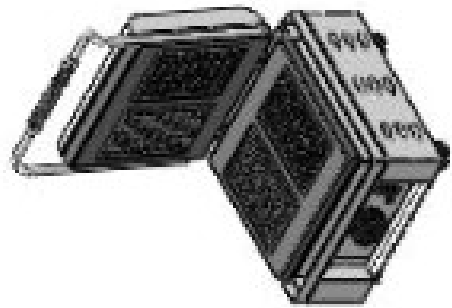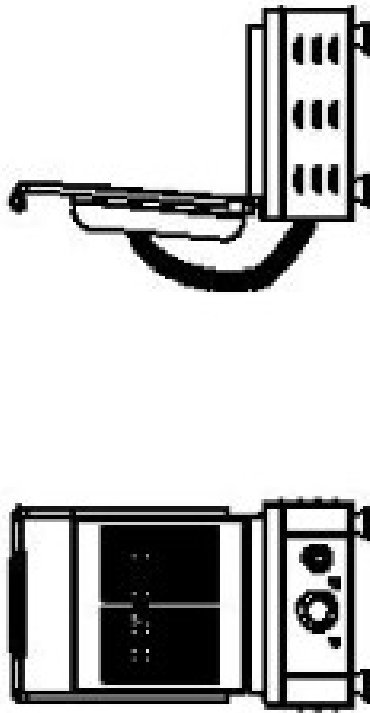

WK 25E - WK 25 DE - WB 25 E - WB 25 DE SPARE PART LIST

CODE	PART NAME
1	BODY
2	TOP COVER
3	FRAME
4	RESISTANCE HOLDER
5	VENTILATION SHEET
6	CONTROL PANEL
7	DOUGH TANK
8	PAKO SWITCH
9	THERMOSTAT BUTTON
10	ON-OFF LAMP (RED)
11	THERMOSTAT LAMP (GREEN)
12	THERMOSTAT
13	CLEANING APPARATUS
14	TOP RESISTANCE
15	BAKALITE HANDLE
16	HANDLE
17	COOKING IRON
18	BAKALITE HANDLE RING
19	TOP RESISTANCE CABLE PROTECTIVE SPRING
20	FOOT
21	LOWER RESISTANCE



DECLARATION OF CONFORMITY

COMPANY NAME : SGS MUTFAK EKİPMANLARI İTH.İHR.TUR.GIDA PAZ. ELEK. SER. HİZ. SAN. ve LTD. ŞTİ.

ADDRESS : Cumhuriyet Mah Balkan Cad No: 20 Yazıbaşı Torbalı İzmir Türkiye

PHONE : 0090 232 2575233 - 2575223 - 2576922 - 2575836

FAKS : 0090 232 2575303

WEB : <http://www.sgsoven.com>

PRODUCT : Flower Waffel Mach.

MODEL : WK 25 E; WK 25 DE; WB 25 E; WB 25 DE

TEST STATEMENT NO : CMK201303-01

HARMONIZED STANDARDS : EN 60335-2-38, EN 60335-1

APPLIED DIRECTIVES : Low Voltage Directive (LVD) 2014/35/EU

We declare as of SGS MUTFAK EKİPMANLARI LTD. ŞTİ. FLOWER WAFFEL MACH. produced by us is in compliance with the above relevant Council of Europe New Approach Directives and Harmonized EN standards that given. We accept all the responsibilities associated with these products.

PLACE / DATE : İZMİR / 13.10.2018

GENERAL MANAGER:

SEBAHTIN YASHAROV YUZEIROV

/ RUŞEN AKSU

S.G.S. MUTFAK EKİPMANLARI İTH. İHR.
TURİZM GIDA PAZ. ELEKTRONİK
SERVİS HİZM. SAN. TİC. LTD. ŞTİ.
Yazıbaşı Mah. Balkan Cad. No: 26 Torbalı/İZMİR
Tel: 0232 257 52 23-257 52 33 Fax: 0232 257 53 03
TORBALI Y.D. 735 028 9108



SGS MUTFAK EKIPMANLARI LTD. STI.

Cumhuriyet Mah. Balkan Cad. No:20

Yazıbaşı-Torbalı/İZMİR-TÜRKİYE

Tel: +90 232 257 52 23

Fax: +90 232 257 53 03

e-mail: info@sgsoven.com

www.sgsoven.com